

Mounting Support- Robust

Pitched Roof



Combination of mounting rails suit for varying roof size



Robust, structurally proven




Direct lateral connections to the rail



Low-cost and time-saving construction

Flat Roof

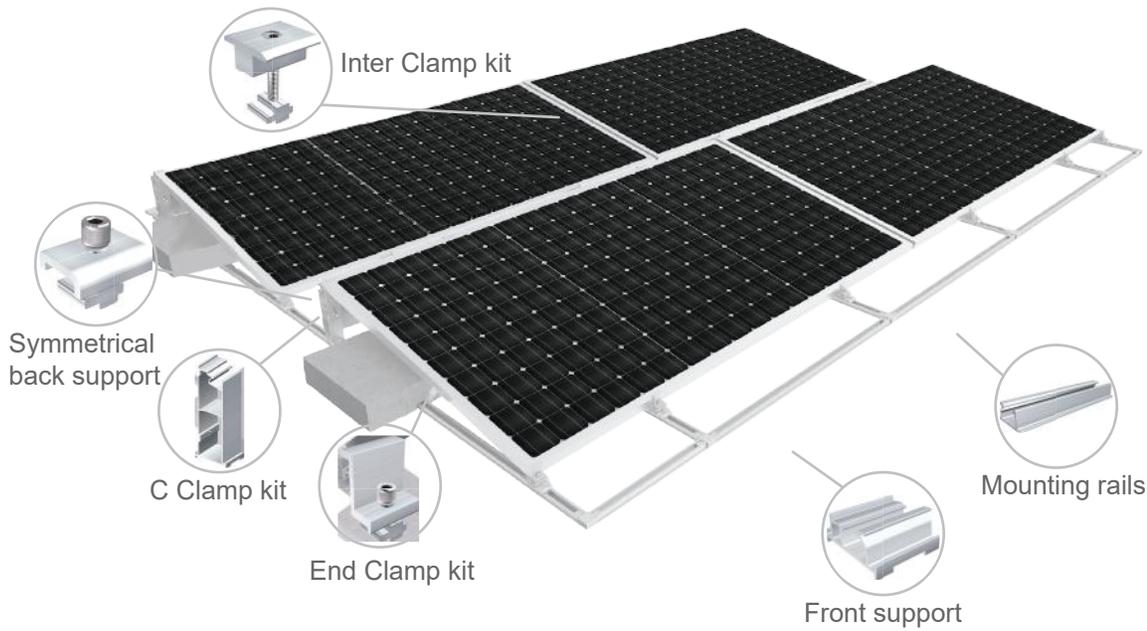

High-strength aluminum alloy material, high durability



Stable structure and strong wind resistance



Placement in portrait orientation of the modules



Flat construction height, can be hidden behind a parapet

PV Cables - Durable And Safe



Safe

Quality Assurance,
TUV/VED certified



Durable

UV resistance, ozone resistance, acid and
alkali resistance, heat resistance




PV cable (Black & Red)

- Rated voltage: DC1500V
- Temperature range: -40°C ~ 125°C
- Outer diameter: $5.5\pm 0.1\text{mm}$
- Test voltage: 6500V, 5min

AC output cable

- Rated Voltage: 600/1000V
- Temperature range: -25°C to $+90^{\circ}\text{C}$
- Maximum voltage output: 1200V
- AC test voltage: 3500V/5min



Earthing cable (Yellow-Green)

- Rated voltage: 450 / 750 V
- AC test voltage: 2500V, 5min
- Maximum temperature rating: 90°C
- Operating frequency: 50Hz

